


PRODUCT BULLETIN

4 THE PURAFIL ESD PARALLEL BED SCRUBBER



THE PURAFIL ESD PARALLEL BED SCRUBBER (PBS) removes high concentrations of odorous gases from screening rooms, headworks, large pump stations, large digesters, full treatment plants among other applications. It is also used to polish biofilter discharge air. The Parallel DBS is built-to-order and sized for airflows from 8,000 to 40,000+ cfm. At the heart of the Parallel DBS is Purafil ESD dry-scrubbing media. The scrubber is designed for horizontal airflow and with passes through two parallel beds on each side of the scrubber.

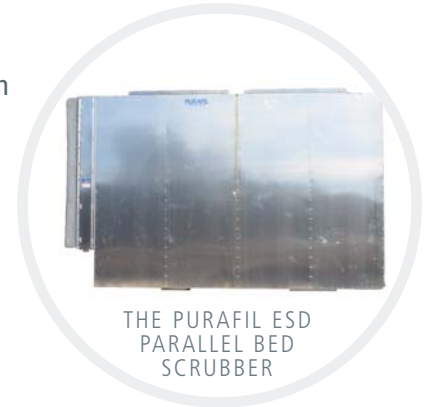

THE PURAFIL ESD
PARALLEL BED
SCRUBBER



PURAFIL ESD
PARALLEL BED SCRUBBER

SYSTEM ADVANTAGES:

PROVIDES ODOR-FREE AIR: The Parallel Bed Scrubber contains up to four, 12-inch deep, vertical media beds (two on each side) perpendicular to the airflow. This multi-bed design ensures extended contact time with odorous contaminants and the highest removal efficiency.

LOW MAINTENANCE: Each of the scrubber's vertical media beds can be replaced independently on an as-needed basis by vacuuming the unit out. This reduces maintenance time and saves in long-term media costs. Media changeout is simple and fast. The media bed is designed to be conveniently accessible. The blower is located externally for easy accessibility.

COMPLETE GAS REMOVAL: Purafil ESD systems are designed for 100% efficiency at any airflow. Purafil ESD offers a variety of dry-scrubbing media, each of which targets a specific gas or gaseous contaminant group. Complete gas removal is achieved by combining two or more media in successive stages. Typically Odorcarb™ Ultra and Odormix™ SP media is used for odor control applications.

LOCAL SERVICE: Purafil ESD's network of local representatives offers convenient and timely service. These factory-trained representatives work in conjunction with Purafil ESD's in-house laboratory to provide Media Life Analysis and other comprehensive technical services.

TARGETED ODORS/GASES:

- Hydrogen sulfide
- Sulfur dioxide
- Mercaptans
- Aldehydes
- Organic compounds

STANDARD FEATURES:

- 3003 H14 aluminum construction
- Stainless steel hatches and hinges
- Mist eliminator/prefilter
- Up to four, 12-inch-deep (308 mm), parallel vertical media beds (two on each side)
- Externally mounted, draw-through blower system design
- Top access media fill chutes
- 1.0 IWG (249 Pa) external static pressure

OPTIONAL FEATURES:

- Double Wall construction
- Air measuring station, CFM gage, and housing (shipping separately for field installation)
- Maintains superior performance in climates with fluctuating temperature and relative humidity
- Lower operating horsepower and pressure drop than activated carbon-only systems
- Sample ports located on side of unit or lid
- Vacuum ports located on side of beds
- Passive applications

APPLICATIONS:

- Large Headworks
- Large Pump Stations
- Large Digesters
- Biofilter discharge
- Sludge Dewatering
- Wastewater Tunnels